


SWH™ Small Wire Harness

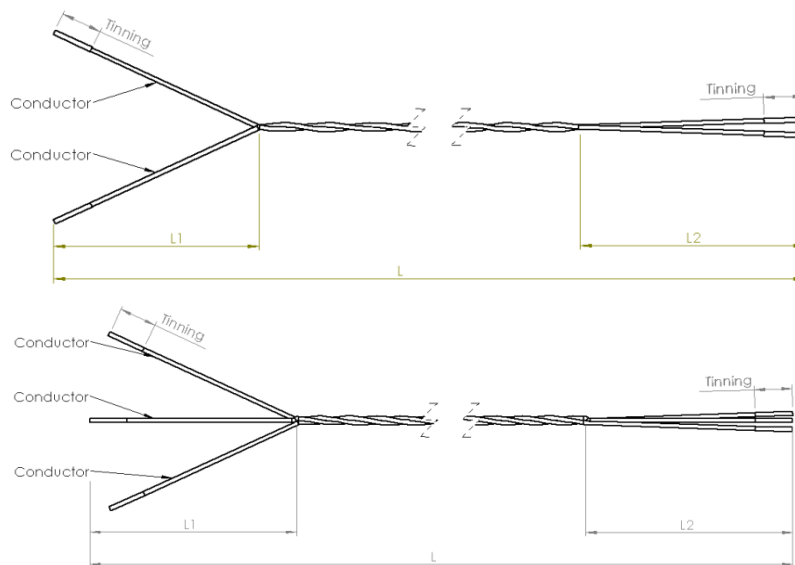

Specifications

Product specifications:

Conductor:	ESW™ Litz wire 6x50µm and 7x32µm (variations available on request)
Number of conductors:	2 or 3 standard (variations available on request) Custom defined. Min L= 10mm. Max L= 100mm
L:	4mm ±1.0mm standard
L1:	4mm ±1.0mm standard
L2:	4mm ±1.0mm standard
Tinning length:	0.5mm ±0.2mm

Material specifications:

Wire type	ESW™ Litz wire - silver plated copper wire
Insulation	HPN Grade 2
Heat index	155°C (20.000h IEC 60172)
Colors	Red, Blue, Yellow, Green, Black and Skin Skin with Red tracer and Skin with Green tracer available for polarity orientation

Electrical Specifications:

Resistance (Nom)	2.81Ω/m at 20°C (Nom) for 7x32µm
Insulation resistance:	> 1MΩ

Compliance:	RoHS REACH
--------------------	---------------